ZAVIO

» B5010/ B5111/ B5210 Quick Installation Guide

8608551000020

Zavio B5010/ B5111/ B5210 Quick Installation Guide

Please follow the installation steps below to set up your B5010/ B5111/ B5210 Bullet IP Camera.
Check the package contents against the list below. ***See P.1***
Physical overview. ***See P.2***
LED Indicator Definition. ***See P.2***
Install the hardware and connect all cables. ***See P.3***
Microsoft OS: Use the software CD to install Intelligent IP Installer. ***See P.3***
Access the IP Camera using Intelligent IP Installer. ***See P.4***
Mac OS using Safari Broswer. ***See P.6***
Lighting environment setting. ***See P.6***
Change the Web Interface into your preferred language. ***See P.7***
Application of IP Camera. ***See P.7***
For more information, please check the User Manual available in the Software CD or you can download the latest software from http://www.zavio.com

Package Contents

Camera	B5010/ B5111/ B5210 IP Camera
Quick Installation Guide	Brief product information and quick installation
Software CD	IP Surveillance Software Intelligent IP Installer User Manuals Language Packs
Accessory	(1) Three-axis wall/ ceiling mounting bracket (2) Screws and anchors for wall/ ceiling mounting (3) Sun Shield (4) Screws for sun shield (5) Cat 5e Female Coupler

Physical Overview

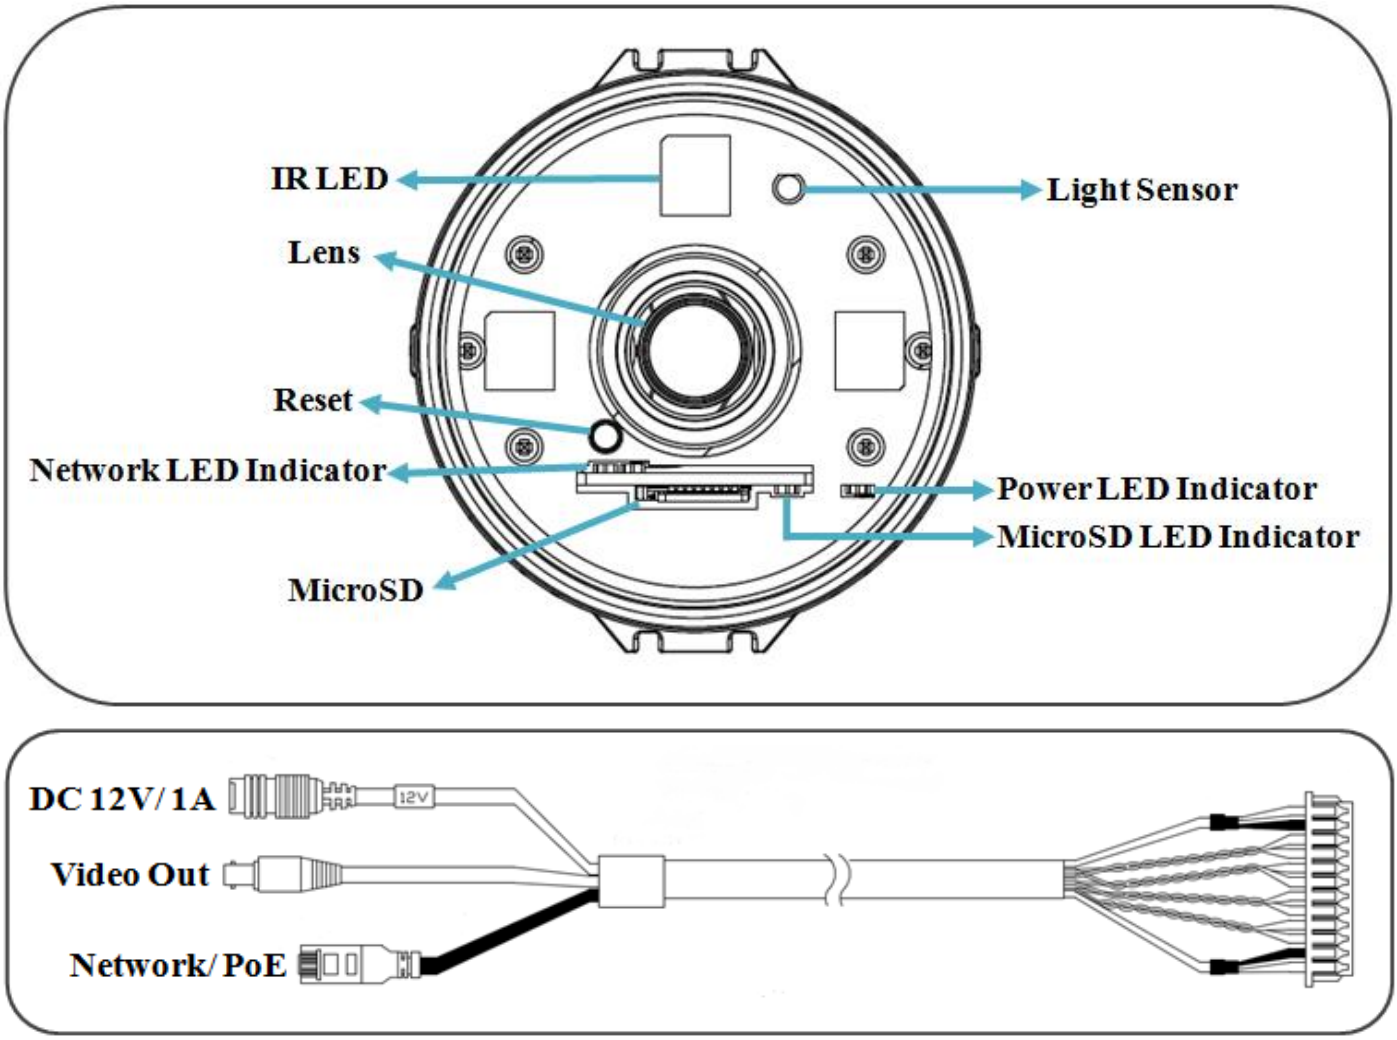

LED Indicator Definition

LED	Indication
Power	Steady red for booting up process.
	Steady blue for booting up completion.
	Flash purple for FW upgrading.
Network	Flash yellow while Network activity.
MicroSD Card	Steady yellow means MicroSD card ready.
	Flash yellow while accessing MicroSD card.

Reset: When the device is empowered, press the Reset Button to reboot the device, or hold the Reset Button for 10 seconds to the settings back to factory default.

Reset process: Press reset button until indicator Unlit→steady red (booting up process)→steady blue (booting up completion)

Reset to default process: Press until indicator steady blue→steady red (booting up process) →steady blue (booting up completion)

Install the hardware and connect all cables

a. Wall mounting and Ceiling mounting

1. Use the 2 supplied screws to fix the base plate to a flat surface.
2. Loosen the screws on the bracket to aim the shooting area.
3. Tighten the screws at the two joints of the bracket.

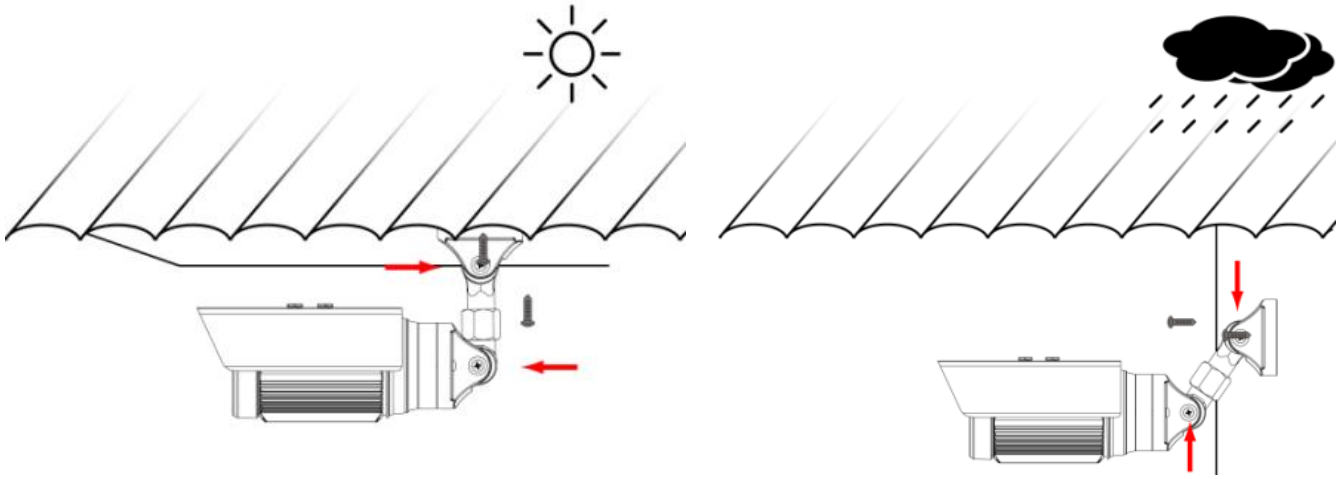

Warning before installation

If you plan to instal the IP camera outdoors, we recommend you to set up the IP camera in the environment where can block the sun and rain.

b. Connet all cables

b1. Without Power over Ethernet (PoE) connection

1. Connect the 12V power adaptor to the IP Camera.
2. Using a standard RJ-45 network cable, connect the IP Camera to a normal Hub/ Switch/ Router.

b2. Power over Ethernet (PoE)

Using a standard RJ-45 network cable, connect the IP Camera to a PoE-enabled Hub/ Switch/ Router.

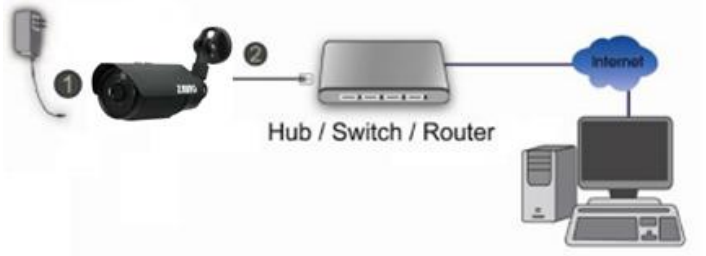

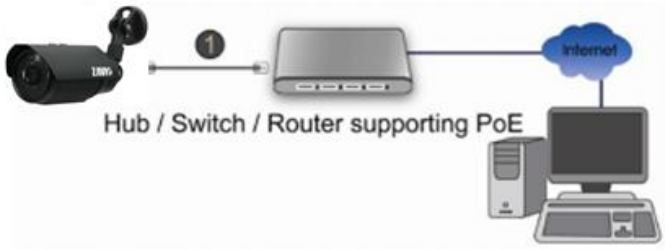

Microsoft OS: Use the software CD to install Intelligent IP Installer

Power on your PC and insert the CD-ROM. The setup page will show up automatically. Please follow these steps to install the firmware.

Selet **"Intelligent IP Installer"** and follow the installation process to complete the installation.

Access the IP Camera using Intelligent IP Installer

1. Please check two settings before using Intelligent IP Installer.

b. Browser's Internet Properties → Security → Default Level

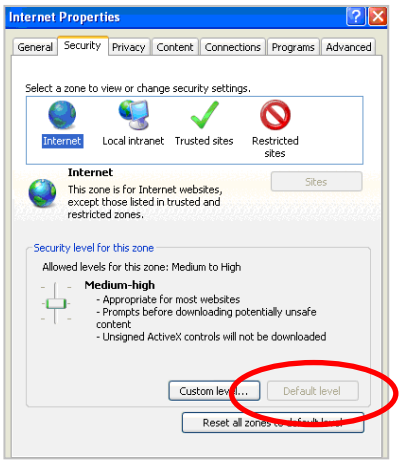

a. Browser's Internet Properties → Privacy → Uncheck Pop-up Blocker

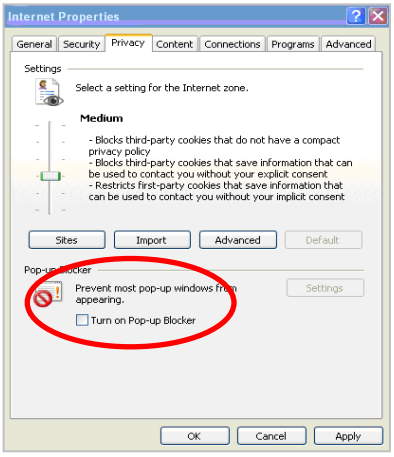

2. Click the Intelligent IP Installer Icon on your desktop. The main page will show up listing all active camera and video server devices. Select the relevant IP camera from the list and click **Link to IE**.

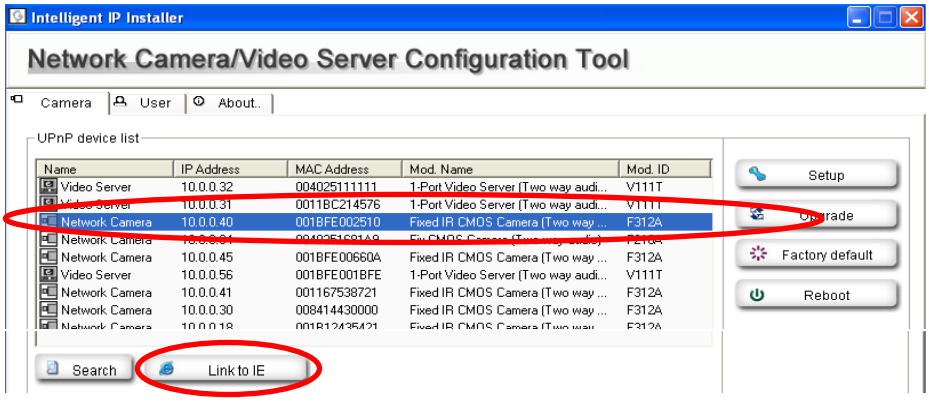
Intelligent IP Installer
Network Camera/Video Server Configuration Tool
Camera
User
About..
UPnP device list
Name
IP Address
MAC Address
Mod. Name
Mod. ID
Video Server 10.0.0.32 004025111111 1-Port Video Server (Two way audi... V111T
Network Camera 10.0.0.40 001BFE002510 Fixed IR CMOS Camera (Two way ... F312A
Network Camera 10.0.0.45 001BFE00660A Fixed IR CMOS Camera (Two way ... F312A
Video Server 10.0.0.56 001BFE001BFE 1-Port Video Server (Two way audi... V111T
Network Camera 10.0.0.41 001167538721 Fixed IR CMOS Camera (Two way ... F312A
Network Camera 10.0.0.30 008414430000 Fixed IR CMOS Camera (Two way ... F312A
Setup
Upgrade
Factory default
Reboot
Search
Link to IE

3. Enter your Username and Password to login to the IP Camera.
(Default is admin / admin)

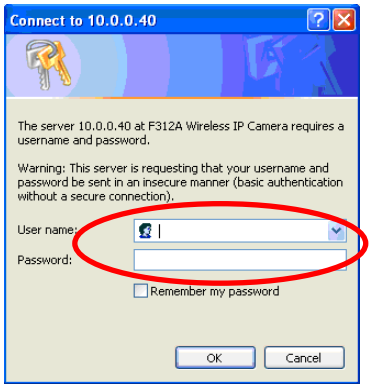
Connect to 10.0.0.40
The server 10.0.0.40 at F312A Wireless IP Camera requires a username and password.
Warning: This server is requesting that your username and password be sent in an insecure manner (basic authentication without a secure connection).
User name:
Password:
Remember my password
OK
Cancel

4. When accessing the IP Camera for the first time, a yellow information bar appears below the address bar: **This website wants to install the following add-on: 'AxvideoView.cab from 'Zavio Inc'.**

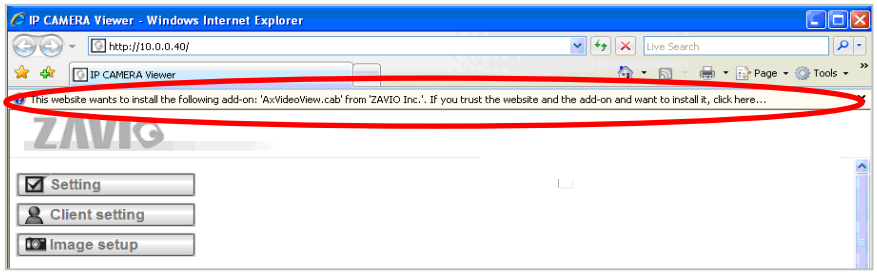
IP CAMERA Viewer - Windows Internet Explorer
http://10.0.0.40/
IP CAMERA Viewer
This website wants to install the following add-on: 'AxVideoView.cab' from 'ZAVIO Inc.'. If you trust the website and the add-on and want to install it, click here...
Setting
Client setting
Image setup

5. Click the information bar, and select **Install ActiveX control**.

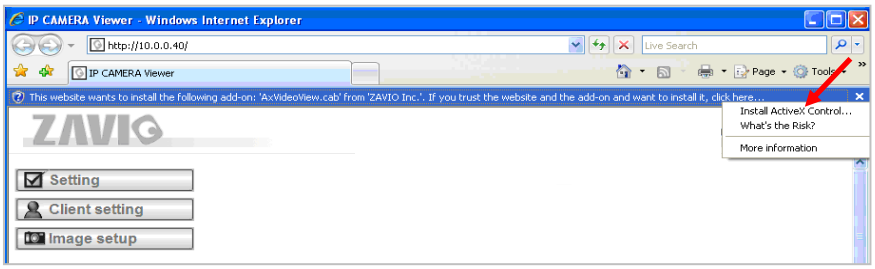
IP CAMERA Viewer - Windows Internet Explorer
http://10.0.0.40/
IP CAMERA Viewer
This website wants to install the following add-on: 'AxVideoView.cab' from 'ZAVIO Inc.'. If you trust the website and the add-on and want to install it, click here...
Install ActiveX Control...
What's the Risk?
More information
Setting
Client setting
Image setup

6. Click **Install**.

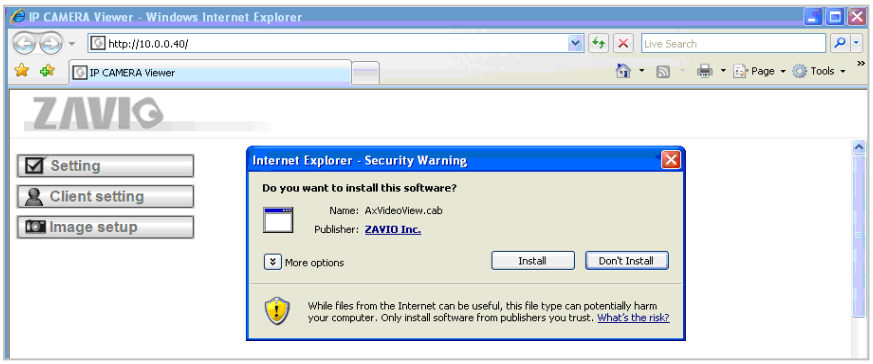
IP CAMERA Viewer - Windows Internet Explorer
http://10.0.0.40/
IP CAMERA Viewer
Setting
Client setting
Image setup
Internet Explorer - Security Warning
Do you want to install this software?
Name: AxVideoView.cab
Publisher: ZAVIO Inc.
More options
Install
Don't Install
While files from the Internet can be useful, this file type can potentially harm your computer. Only install software from publishers you trust. What's the risk?

7. Live video displays in the centre of your web browser.

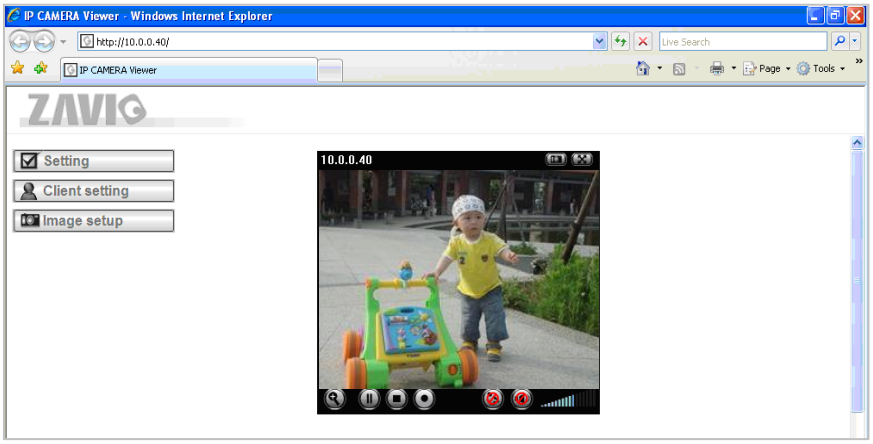

Mac OS using Safari Browser

1. Select **Safari icon**

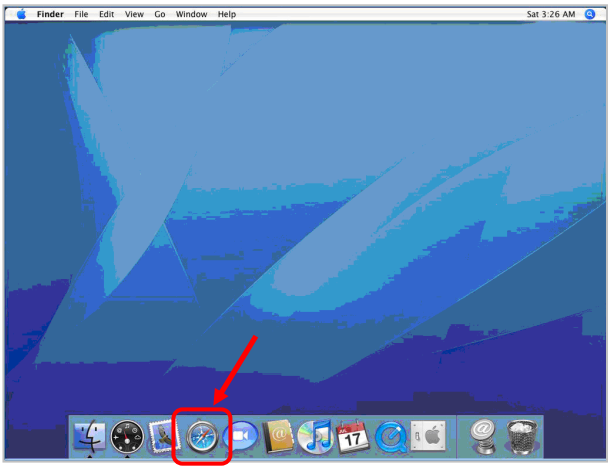

2. Click **Bonjour function** and select the camera you wish to access.

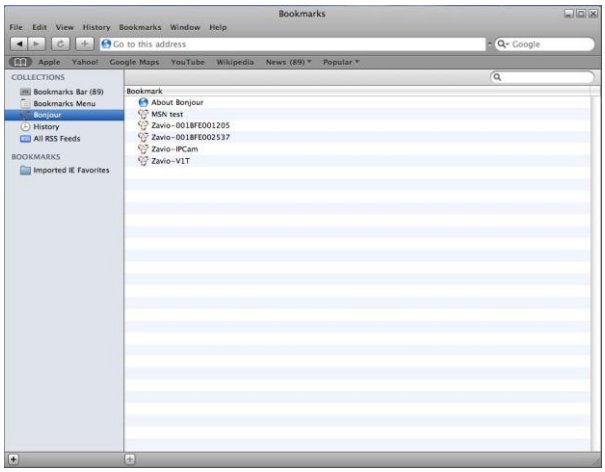

3. Enter name and password to login to the IP camera. (**Default is admin / admin**)

4. The monitor image will be displayed in your browser.

Lighting environment setting

The default setting of lighting environment is **Auto**. However, you may also select 50 or 60 Hz upon the lighting environment of your country.

Go to "Setting > Live View > Camera Setting > Image Setting", select the environment setting you wish.

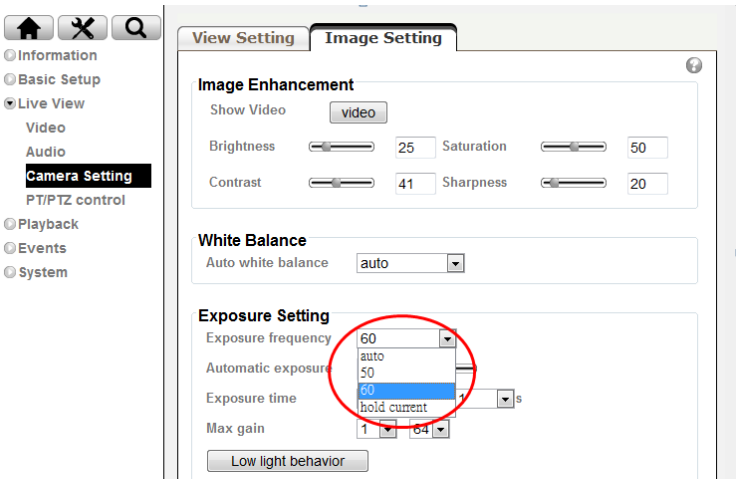

Change the Web Interface into your preferred language

Use the settings screen to set the language of the Web Interface.

Go to “Setting > System > Maintenance ”.

1. Insert Software CD into your CD-ROM.
2. Browse and select the preferred language from language pack in the Software CD and then click OK.
3. The web interface will change into your preferred language.

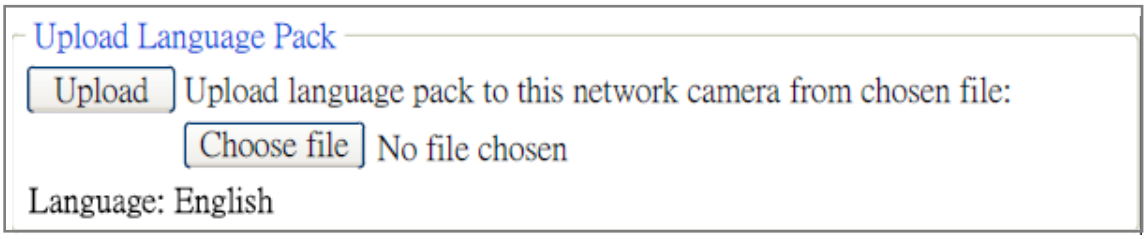

Application of IP Camera

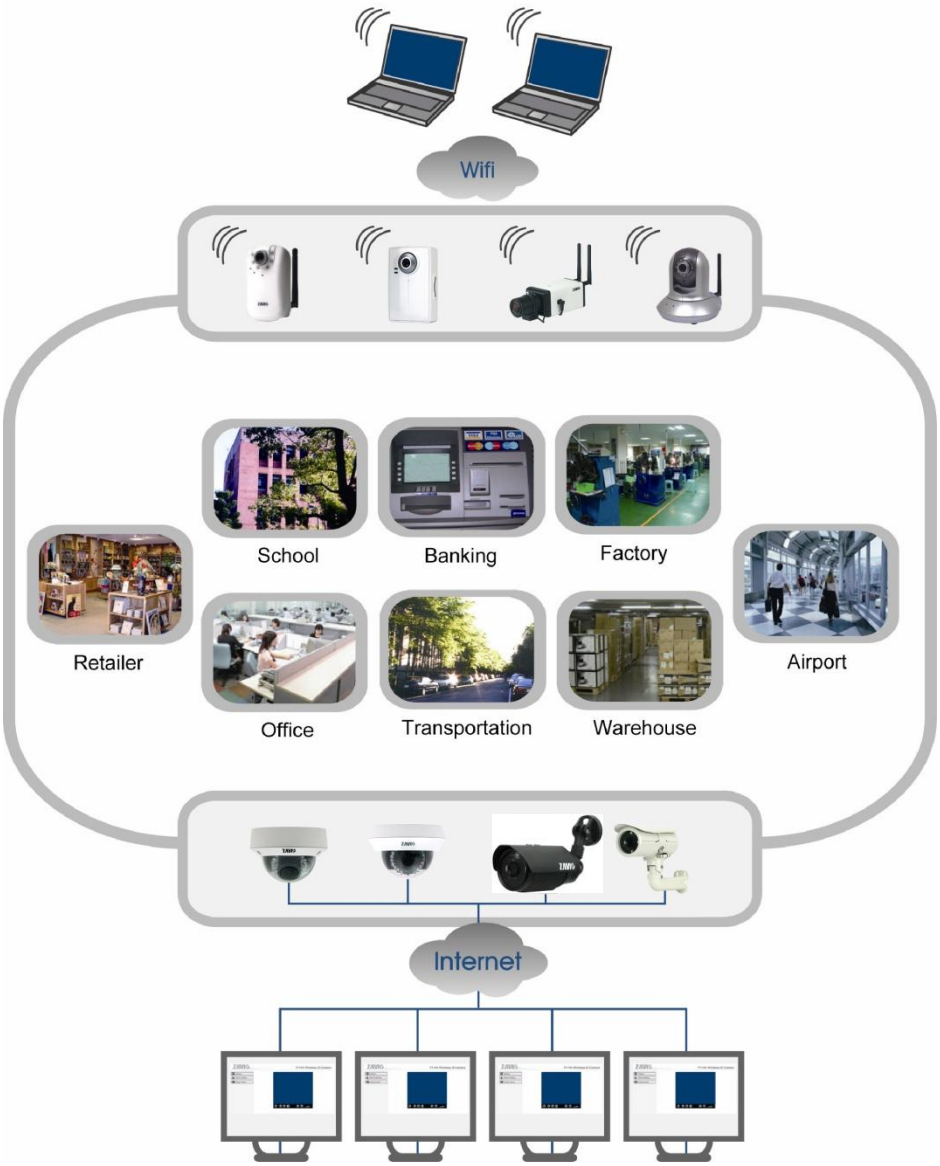

Memo

www.zavio.com

Memo

www.zavio.com

Memo

www.zavio.com

ZAVIO

www.zavio.com

E-mail: sales@zavio.com Tel: +886 3 5790275 Fax: +886 3 6686845